

Fig. 1


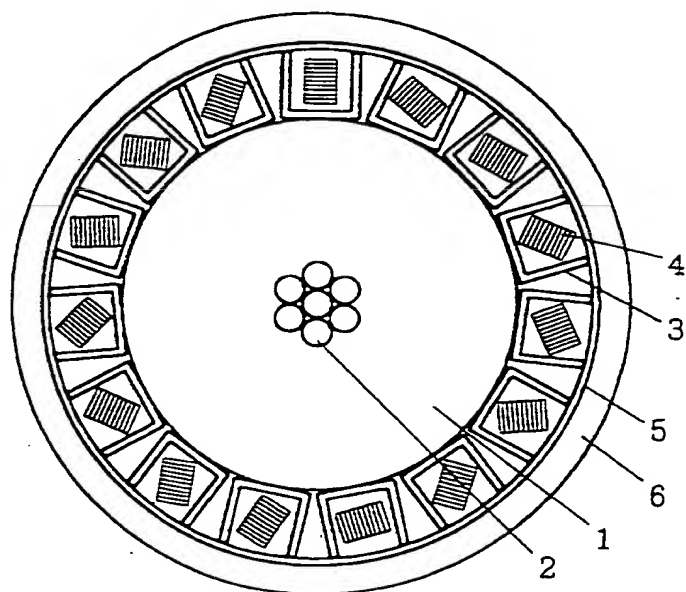


Fig. 2

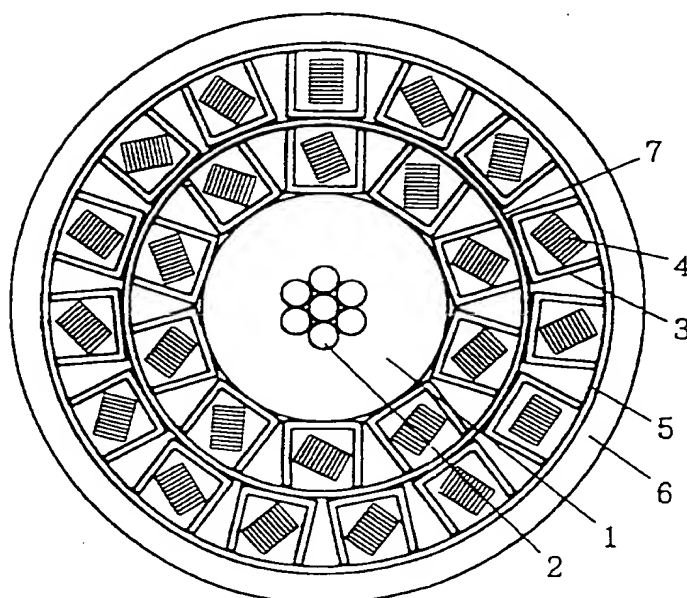

09505989-021700

Fig. 3


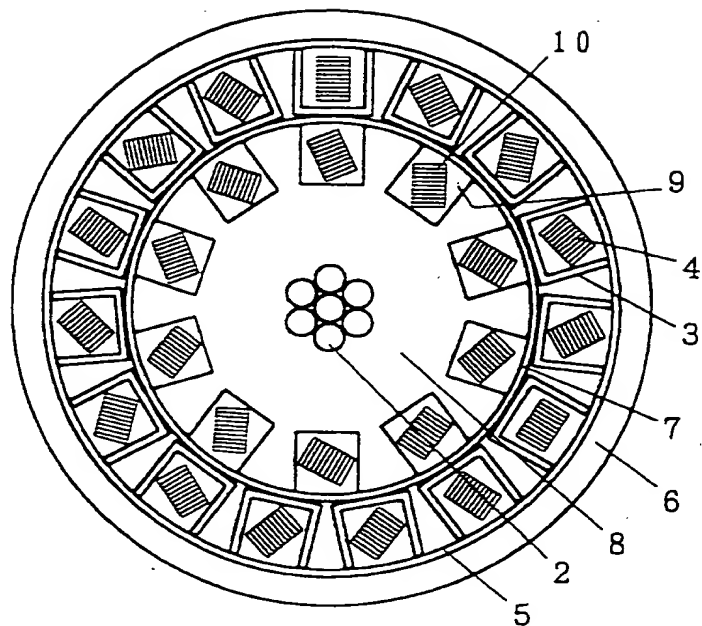


Fig. 4

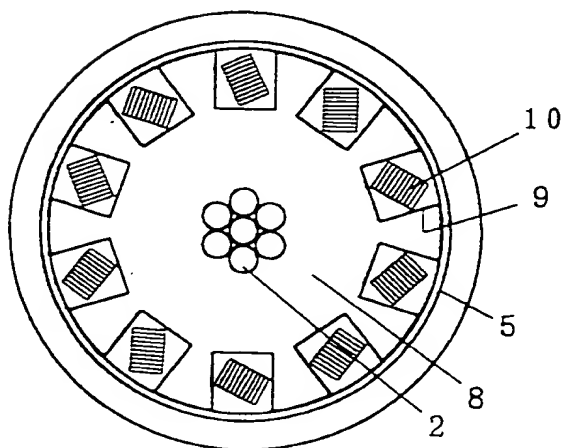

007720" 60650560

Fig. 5A


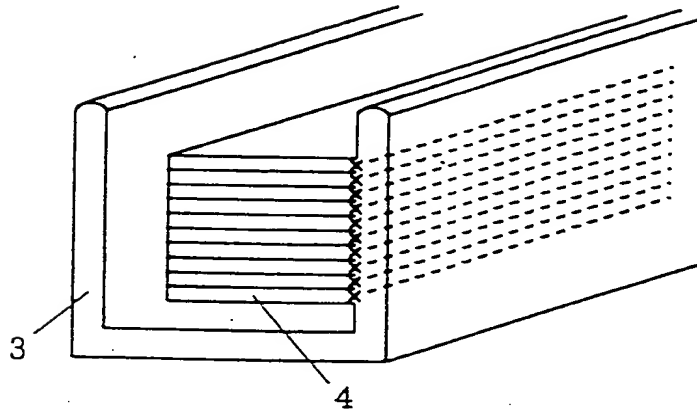


Fig. 5B

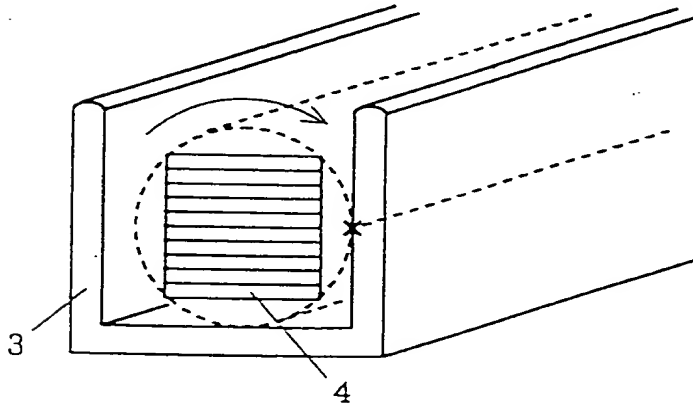


004720" 6950260

Fig. 6

cable	one-groove spacer		maximum transmission loss			
	twisting direction	pitch length (mm)	1000	700	600	400
first embodiment	S twisting	700	0.28	0.24		0.23
	SZ twisting	700	0.26	0.25	0.22	0.21
second embodiment	S twisting	inner layer 700	0.27	0.23		0.22
	SZ twisting	outer layer 700	0.28	0.24		0.23
	S twisting	inner layer 700	0.25	0.25	0.21	0.21
	SZ twisting	outer layer 700	0.26	0.25	0.22	0.21
third embodiment	S twisting	700	0.28	0.24		0.23
	SZ twisting	700	0.26	0.25	0.22	0.21

004T201605989104700

FIG. 7

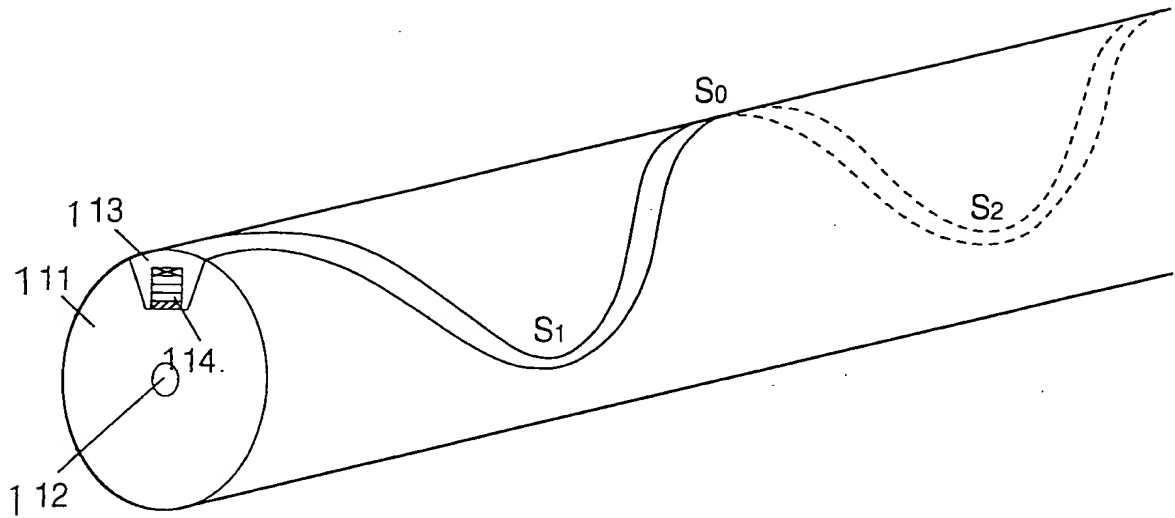

00720 69550550